


TUNGSTEN SMART-HEAT

An infrared electric heater blending aesthetics and function

It's stylishly designed provides efficient directional heating, compatible with smart control systems to enable precise dimming control with it's simple one-touch on/off switch.

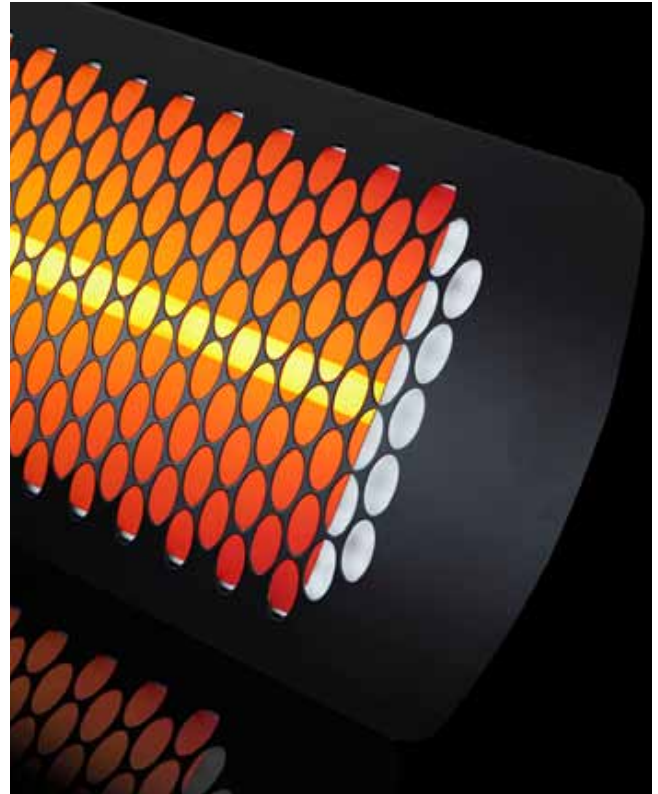


Tungsten Smart-Heat™ Electric
2000W





Tungsten Smart-Heat™ Electric
3000W



Tungsten Smart-Heat™ Electric
4000W



Tungsten Smart-Heat™ Electric
6000W





Water / splash resistance, the Tungsten Smart-Heat™ Electric works in almost any weather condition. The swivel bracket allows the heat to be directed in the desired location. It's equipped with a spectral reflector for excellent radiant heat output.

Features


- Available in 2000W, 3000W, 4000W and 6000W models
- Frosted infrared tube heating elements emit warm amber glow - No harsh glare.
- High temperature corrosion-resistant coating.
- Tamper-proof electrical wiring enclosure
- Wall & ceiling mounting options allow for adjustable angle of the heating direction.
- Patent Pending & Australian Registered Design 338721




Specifications

TUNGSTEN SMART-HEAT				
	2000W	3000W	4000W	6000W
Model	2000W	3000W	4000W	6000W
Part no.	2620212	2620213	2620214	2620215
No. of Elements	Single element	Single element	Double element	Double element
Bracket Length	164mm	164mm	244mm	244mm
Power (Watts)	2000W	3000W	4000W	6000W
Approximate area heated (m ²) (Mounting height of 2400mm)	up to 6m ²	up to 9m ²	up to 12m ²	up to 15m ²
Power connection required (Volts/Amps)	230 V / 8.3 A	230 V / 12.5 A	230 V / 16.6 A	230 V / 25 A
Dimension (WxDxHmm)	1117 x 214 x 86mm	1410 x 214 x 86mm	1117 x 214 x 86mm	1410 x 214 x 86mm
Minimum Mounting height requirement to ground	Ceiling Mounting - 2400mm / Wall Mounting - 1800mm			
Weight (kg)	9kg	10kg	9kg	10kg
Finish	Black High Temperature Coating			
<small>*Must only be installed and serviced by a licensed and authorised technician. Product manual must be read before installing or servicing this product.</small>				


Heating areas (assumed mounting height of 2400mm)

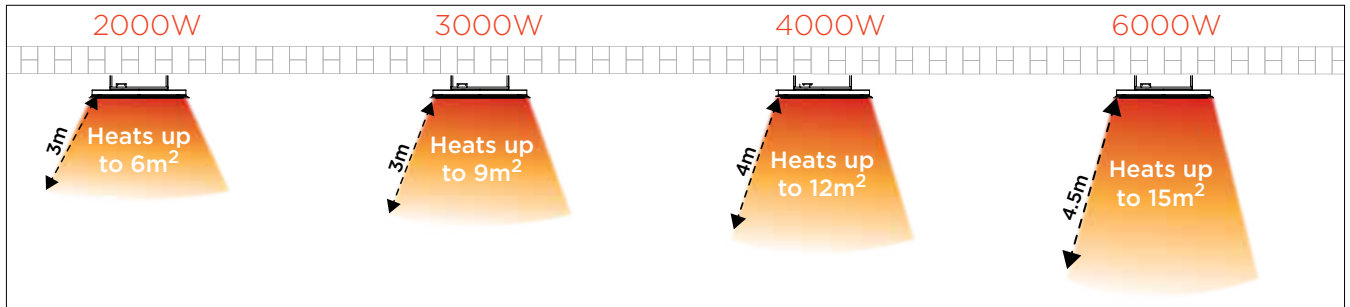

Dimensions (all measurements are in mm)

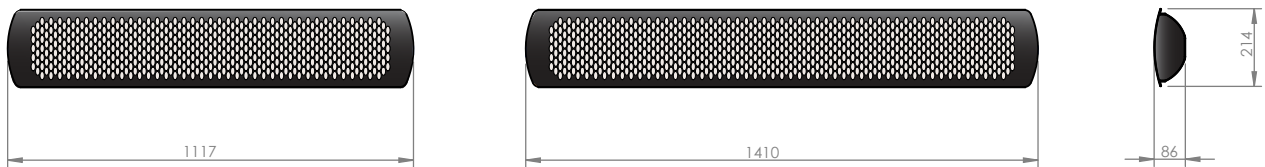

Recommended Minimum Installation Clearances

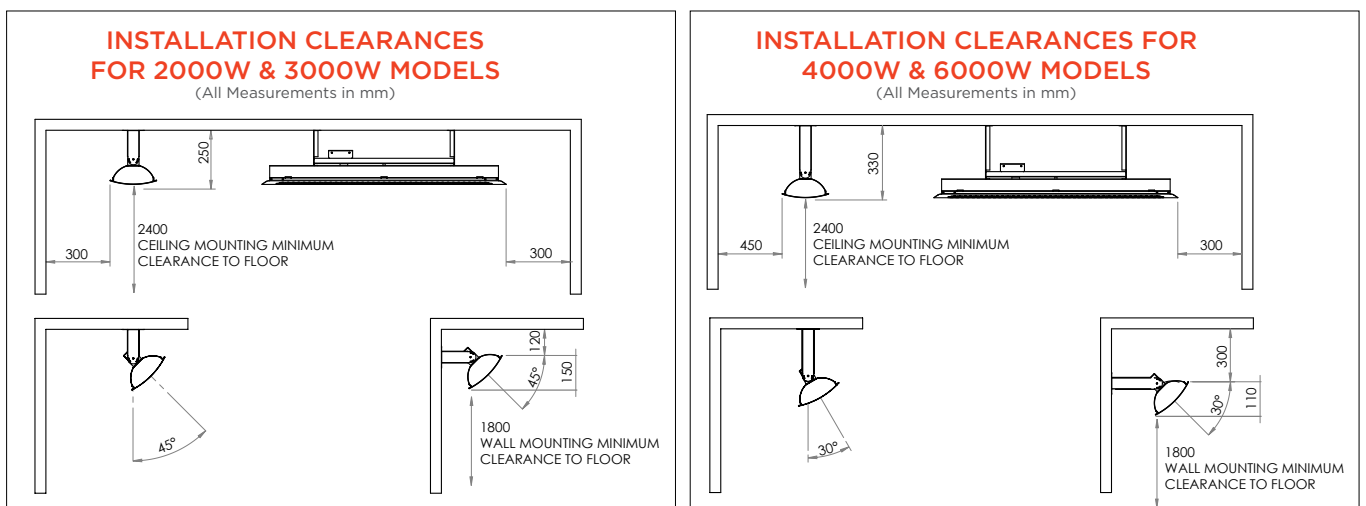

*Alternatively, short mounting brackets can be used for wall mounting of the 4000w & 6000w models to position the heater closer to the wall. Short mounting brackets must be purchased separately.