

INT - 3.11 SC 65 95 70

INTERNAL MANUAL BLACKOUT SYSTEMS

CRANK OPERATED BLACKOUT ROLLER BLIND SYSTEMS

APPLICATION SC 65 95 70

The Helioscreen full blackout system is extremely versatile and is ideal for situations where a complete light block out is necessary like boardrooms and home theatres in both commercial and domestic applications. The system features stylish steel side channels with double internal brushes. This system is operated via a removable crank mechanism. The Warranty on the Helioscreen crank operated Blackout systems is 5-years.

SYSTEM SPECIFICATIONS SC 65 95 70

MINIMUM WIDTH	800mm
MAXIMUM DROP	3000mm
MAXIMUM WIDTH	3200mm



TECHNICAL INFORMATION SC 65 95 70

HEAD BOX	<ul style="list-style-type: none">• Side brackets press formed steel, pre-treated and powder coated• Bracket/head box projection 95mm• Head box to be custom powder coated
CONTROL END	<ul style="list-style-type: none">• Crank operated system with detachable crank handle• Parts made with high strength fibreglass reinforced polyester and high carbon steel
TUBE	<ul style="list-style-type: none">• 100% extruded aluminium• 65mm outside diameter• 2.0mm wall thickness
SIDE CHANNELS	<ul style="list-style-type: none">• 70mm x 26mm blackout aluminium side channels with compressible blackout brush seal• Side channels to be custom powder coated
IDLE END	<ul style="list-style-type: none">• Comprises of an outside sleeve and centre shaft• Roller rides on bearing surface
BASE BAR	<ul style="list-style-type: none">• 18mm x 35mm extruded aluminium base bar helio style with compressible blackout brush seal• Custom powder coating

INTELLIGENT
SUN CONTROL
SOLUTIONS®

INT - 3.11 SC 65 95 70


2D DIAGRAM SC 65 95 70

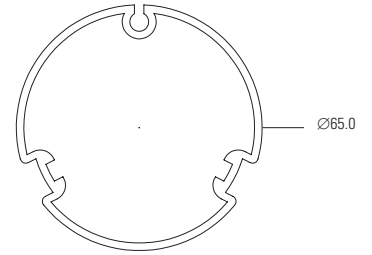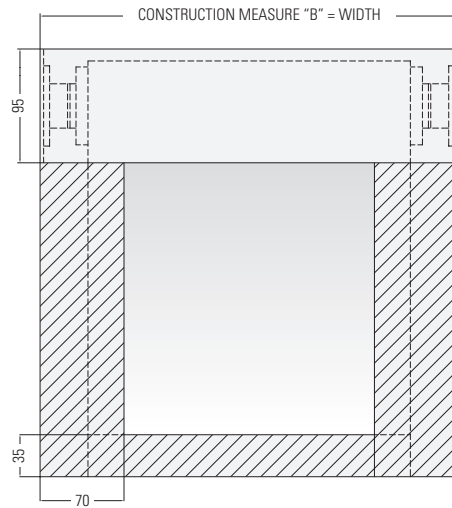


TUBE 65mm

COMPONENTRY SC 65 95 70

70mm HEADBOX END CAP

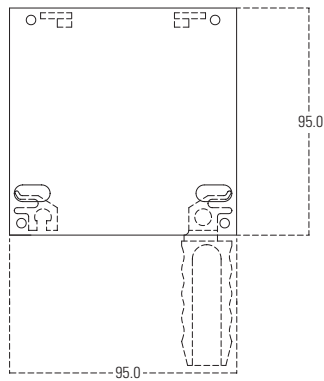

70mm SIDE CHANNEL



BASE BAR SC 65 95 70

HELIO

