

## Twin Pleated Blind

### Product Information

Verosol's **Twin Pleated Blind** is a versatile blind practical for both day and night time use. A two-in-one pleated blind offering privacy without losing your view – select a sheer fabric and enjoy your day time view, and a blackout fabric for room darkening and insulation at night.

Simple and elegant, with a small stack height and short projection, giving you an uninterrupted view from your home or office window. Ideal for rooms requiring extra light control for video screens and audio visual presentations.

Pleated Blinds with Guide Wires are a great idea when installing blinds on internal doors, as well as an ideal solution for boats and motor homes.

### Further Information

To find out more information phone Verosol Customer Care on 1800 721 404 or visit [www.verosol.com.au](http://www.verosol.com.au)



### Technical Information

<b>Product Code</b>	P202.0	
<b>Product Name</b>	Twin Pleated Blind	
<b>Operation</b>	Cord Operation	
<b>Dimensions</b>	Width	300mm minimum - 3000mm maximum
	Drop	200mm minimum - 3200mm maximum
	Cord Lock	5.7m <sup>2</sup> maximum area
	Maximum Area	7m <sup>2</sup>
<b>Head Rail</b>	Material	Extruded Aluminium Alloy - Aymmetric Profile
	Dimensions	33mm W x 20mm H
<b>Bottom Rail</b>	Material	Extruded Aluminium Alloy - Aymmetric Profile
	Dimensions	30mm W x 12mm H
	Colours	Coordinated - Refer to "Pleated Rail Chart"
	Paint	Electrostatic Powder Coated and Baked
<b>Inner Rail</b>	Material	UV Stabilised Acrylonitrile Butadiene Styrene [ABS] Plastic
<b>End Caps</b>	Material	UV Stabilised Polymer Acrylic
	Colour	Coordinated - Refer to "Pleated Rail Chart"
<b>Lift and Blind Cords</b>	Material	Braided Polyester [minimum diameter: 2.2mm]
	Colour	Coordinated - Refer to "Pleated Rail Chart"
<b>Control Lock</b>	Material	ULTEM / PPS-Fortran
	Type	Front Mounted
	Colour	Grey with coordinated colour
<b>Cord Position</b>	Lift Cords 70mm from edge; Maximum spacing 500mm	
<b>Installation Brackets</b>	Material	Electro Plated Steel
	Operation	Top or Face Fixing - concealed when installed

Turn over for motorisation and optional extras

# Twin Pleated Blind

## Motorisation



<b>Product Code</b>	P202.5		P202.6	
<b>Product Name</b>	Twin Motorised Pleat		Twin Motorised Pleat	
<b>Operation</b>	24V AC Motorised		240V AC Motorised	
	Width	1200mm minimum	Width	1500mm minimum - 5000mm maximum
	Drop		Drop	200mm minimum - 3200mm maximum
	Maximum Area	10m <sup>2</sup>	Maximum Area	15m <sup>2</sup>
<b>More Information</b>	Refer to "8.0 Motorisation" in your Verosol Price List for more information			

## Optional

<b>Guide Wire System</b>	Angle	Up to 15° angle from vertical
	Maximum Width	1500mm
	Maximum Area	4.8m <sup>2</sup>
	Cable	Stainless steel woven wire cable, 20mm from edge

## System Diagrams

### Twin Pleated Blind

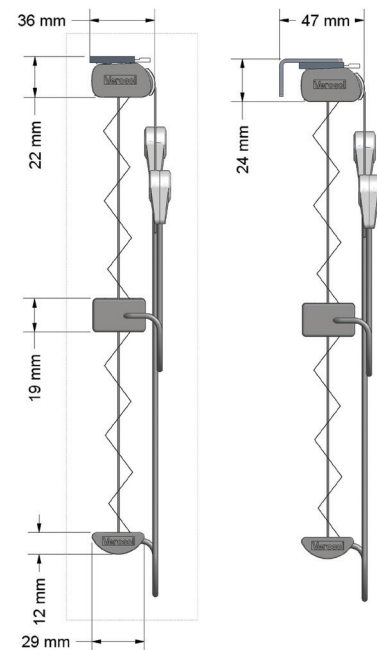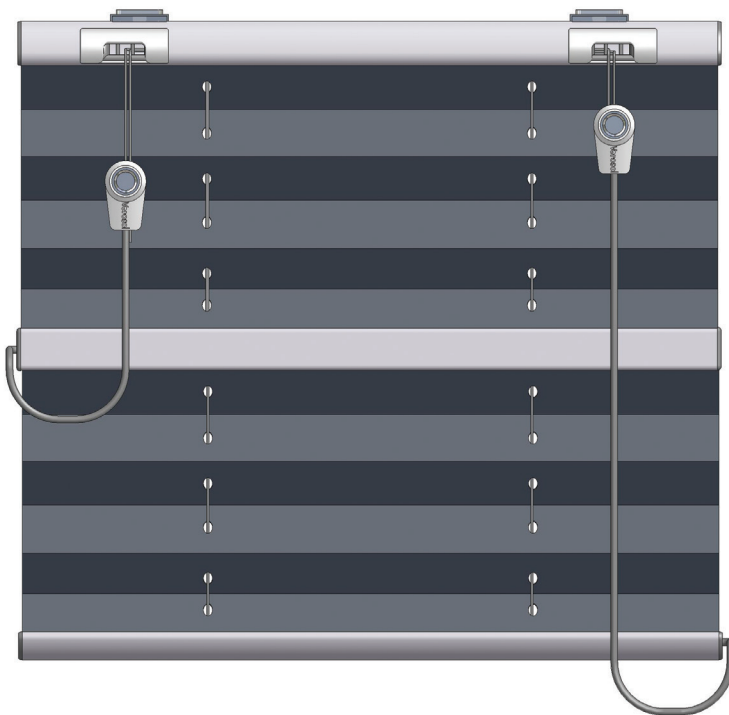

Top Fix

Face Fix

Visit Verosol Price List for more system diagrams